

RINOX EVO & RINOX SMART

Diaphragm pressure reducing valves with inspectionable internal cartridge and removable filter.

The **RBM Rinox Evo** are diaphragm operated pressure reducing valves with inspectionable and easily interchangeable internal cartridge, complete with removable filter.

The internal cartridge compensated seat allows for a stable downstream setting even as the upstream pressure builds up.

In addition, the **Rinox Smart** pressure reducing valve is equipped with a graduated knob to carry out the calibration, without the use of a pressure gauge and tools.


SPARE PARTS AND MAINTENANCE

Before carrying out any maintenance operation, shut off the pressure reducing valve.

For the replacement, control and cleaning of the reducer, simply unscrew the cap and remove the internal cartridge, which contains all the mobile parts.

It is possible to remove the filter for cleaning or replacement.


During these operations, the body remains installed on the system.

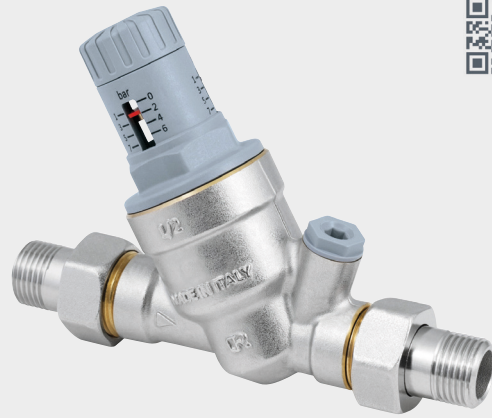

RINOX SMART



RINOX EVO

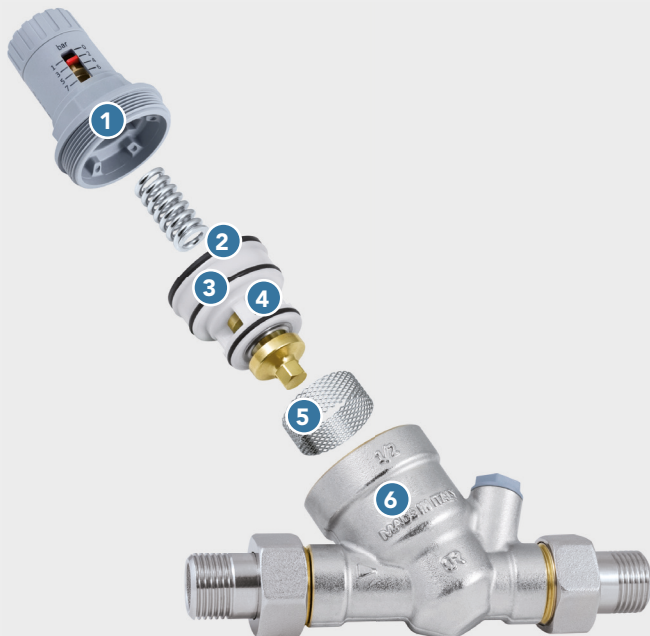

Diaphragm pressure reducing valve

Inspectionable internal cartridge and filter

Body made of brass anti- dezincification (CR)

Out pressure calibration knob

Cartridge compensated

- 1 Polymer cap
- 2 Diaphragm made of elastomer
- 3 Additional sealing o-ring made of elastomer
- 4 Cartridge
- 5 Filter (800 micron)
- 6 Body made brass anti-dezincification (CR)